


**Special material
solutions
for Aerospace
applications**

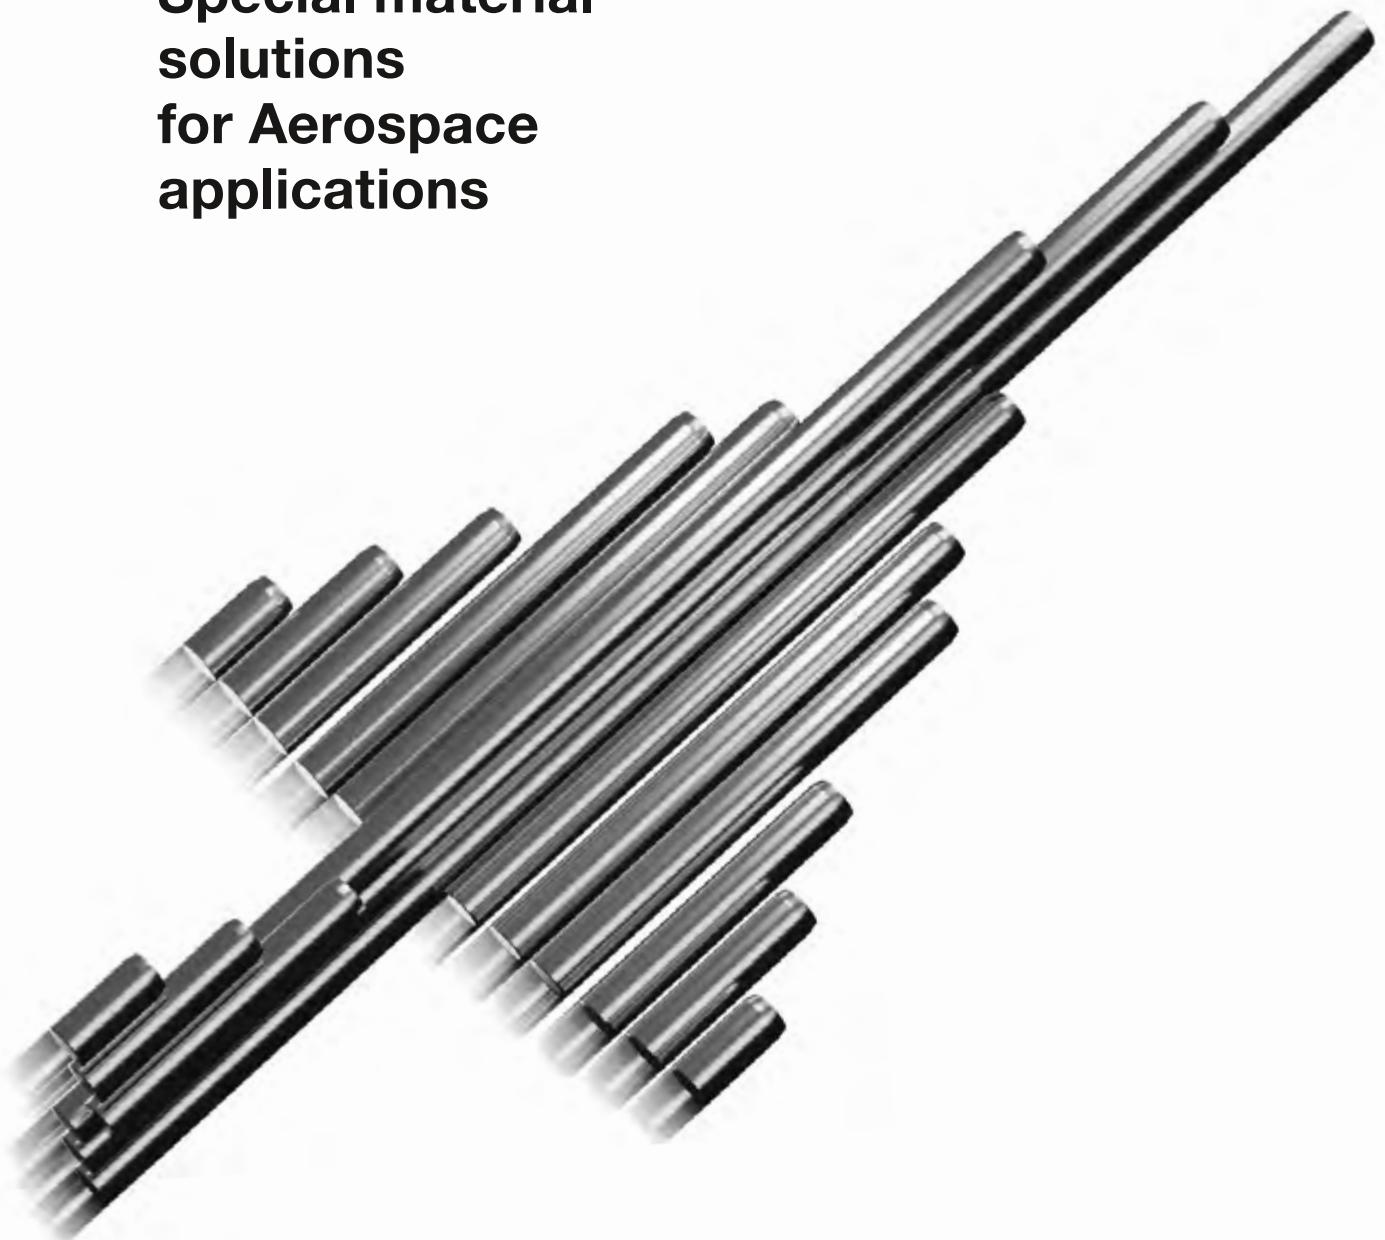

**Swiss
Steel**
Group

Deutsche Edelstahlwerke + Ugitech

Materials for precision landing.

The combination of modern production facilities, a wide product range and the host of mill and product approvals has resulted in Deutsche Edelstahlwerke and Ugitech becoming prominent suppliers of aerospace materials.

As producers of aerospace materials with more than 50 years of experience, we strive to continuously improve our product range to better meet the increasing demands of this innovative and rapidly growing industry.

Deutsche Edelstahlwerke and Ugitech have an overlap in production capabilities and facilities and this, combined with our own mill stock facilities, ensures a high degree of security for supply chain management.

Together we can deliver most of the common aerospace steel grades to meet your requirements.

This brochure provides information about the range of product shapes and sizes as well as the main grades and specifications we are able to offer.

Our product range for aerospace materials


Deutsche Edelstahlwerke

Shapes	Size range	Surface condition	Tolerances
Billets / Blooms for forging	50 – 600 mm	Shot blasted, milled Hot-rolled or forged, rough peeled	Depending on size EN 10060, DIN 7527-6 ISO k12 - k13
Round bars	20 – 500 mm	peeled, polished, ground	ISO h8 – h11
Square bars	50 – 105 mm	Hot-rolled or forged, descaled, ground or milled	Depending on size
Flat bars	50 x 30 mm to 350 x 120 mm	Hot-rolled or forged, descaled, ground or milled	Depending on size

Ugitech

Shapes	Size range	Surface condition	Tolerances
Round bars ex-mill	10 \leq Ø $<$ 20 20 \leq Ø \leq 120	Ground, drawn turned and polished	h8, h9
Round bars ex-stock	10 \leq Ø $<$ 20 20 \leq Ø \leq 120	Ground turned and polished	h9 h10, h11 k12, k13

Shapes	Size range	Surface condition/ profile shape	Tolerances	Packaging
Round drawn wire	0.013 – 15 mm	As drawn / ground	Up to IT depending on application On measurement 0.01 mm standard deviation 0.002 mm	Coils, bars up to 15 mm (super alloys) Coils, spools
Profiled drawn wire	1.30 – 70 mm ²	No limit		

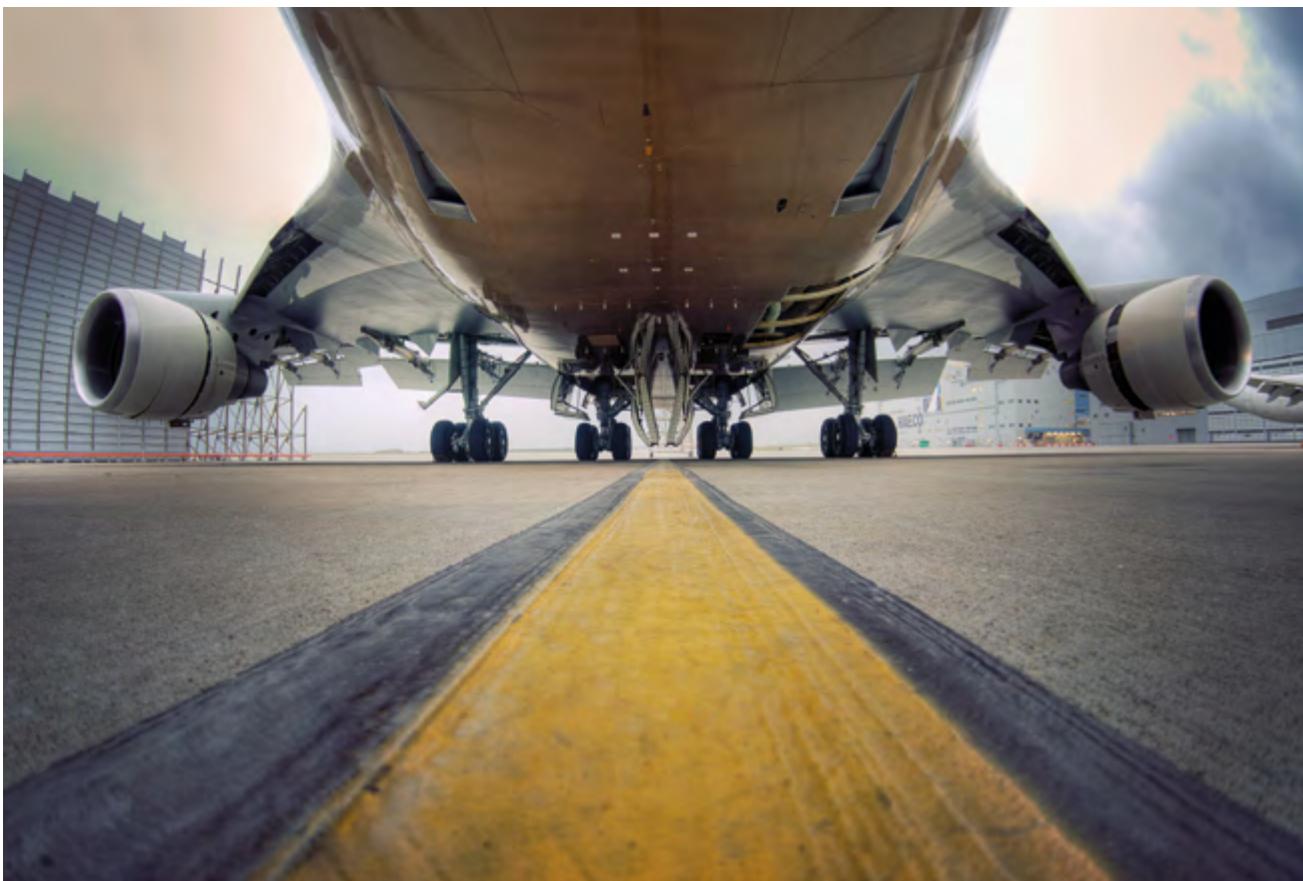

Document not contractually binding. See disclaimers at back cover page of this document.

Steel grades and applications

Based on its extensive production facilities Deutsche Edelstahlwerke and Ugitech are able to supply the entire portfolio of steel grades and special materials required for aerospace applications.


This includes stainless as well as engineering steels. If steels are specified for the most challenging demands in the aerospace industry, it is often required that the cleanliness of the steels fulfills the utmost requirements. This is especially the case when the components are subjected to fatigue or cycle loading in service. In such cases the steel can be remelted in our remelting facilities.

The remelting operation is required to remove non-metallic inclusions from the steel and can be performed under normal atmospheric conditions, under inert gas or even vacuum, using vacuum-arc-remelting facilities.


In addition to improve the cleanliness of the steel, the remelting operation also leads to significantly higher homogeneity of the steel and helps to minimize segregations.

Remelting facilities

Electro-Slag-Remelting (ESR)

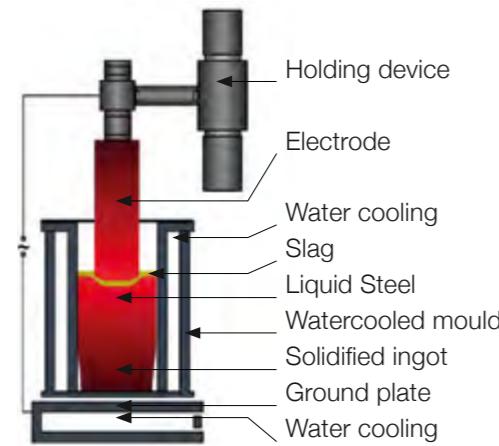

Vacuum-Arc-Remelting (VAR)

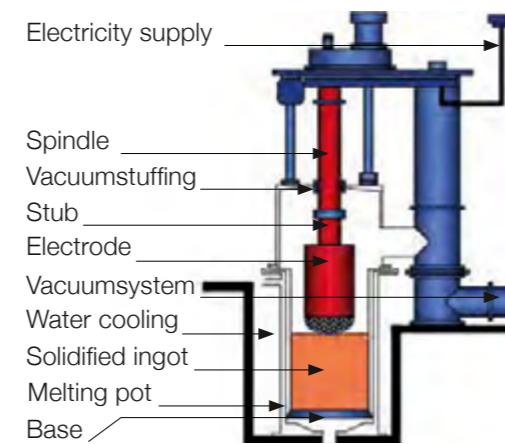

Document not contractually binding. See disclaimers at back cover page of this document.

Services we are able to provide

- Cutting facilities
- Heat treatment
- Marking (laser, hard stamping, ink, line)
- Specific NDT
- Lab testing
- 3rd party inspection
- Packaging and traceability
- Dedicated customer articles
- Customizations



Stainless steel

Common Designations				Producer	Main Specifications
Brand	German	French	American / British		
UGI® 4006A				Ugitech	
Aerodur® 4006	1.4006	Z12C13	AISI 410	Deutsche Edelstahlwerke	AMS 5613 - AMS-QQ-S-763
Aerodur® 4014	1.4014 / 1.4021	Z20C13	AISI 420	Deutsche Edelstahlwerke	WL 1.4014 - BS S62 - AMS-QQ-S-763
UGI® 4028 AIR				Ugitech	AIR 9160C - AMS QQS 763
Aerodur® 4028	1.4028	Z30C13	AISI 420	Deutsche Edelstahlwerke	
UGI® 4057Q / UGIPURE® 4057				Ugitech	WL 1.4044 - AIR 9160C - EN 3490
Aerodur® 4044	1.4057 / 1.4044	Z15CN17-03	AISI 431	Deutsche Edelstahlwerke	WL 1.4044 - AIR 9160C - EN 3490 - BS 7S80
UGI® 4305 / UGIMA®-X 4305				Ugitech	AMS 5640
Aerodur® 4305	1.4305	X8CrNiS18-9	AISI 303	Deutsche Edelstahlwerke	AMS 5640
UGI® 4307Q / UGIMA®-X 4307				Ugitech	WL 1.4314 - NF EN 2465 - AMS 5639 - AMS 5647 - AMS-QQ-S-763
Aerodur® 4307	1.4306 / 1.4307	Z2CN18-10	AISI 304/ 304L	Deutsche Edelstahlwerke	WL 1.4314, AIR 9160C - NF EN 2465 - AMS 5639 - AMS 5647 - AMS QQ-S-763
UGIPURE® 4909 / UGIMA®-X 4404				Ugitech	AMS 5648 - AMS 5653 - AMS-QQ-S-763
Aerodur® 4404	1.4404	Z3CND17-11-02	AISI 316/ 316L	Deutsche Edelstahlwerke	AMS 5653 - AMS 5648
UGI® 4418Q / UGI® 4418QHP / UGIPURE® 4418				Ugitech	AIR 9160C - NF EN 4628 - NF EN 4631
Aerodur® 4418	1.4418	Z8CND17-04	-	Deutsche Edelstahlwerke	AIR 9160C
UGI® 4541Q / UGIPURE® 4541				Ugitech	AIR 9160C - AMS 5645 - AMS-QQ-S-763 - NF EN 3487 - WL 1.4544
Aerodur® 4541 / 4544	1.4541 / 1.4544	Z10CNT18-11, Z6CNT18-10	AISI 321	Deutsche Edelstahlwerke	WL 1.4544 - AIR 9160C - EN 3487 - AMS 5645 - AMS QQ-S-763
UGI® 4542Q / UGI® 17-4PH				Ugitech	AMS 5643 - NF EN 3160 - NF EN 3161
Aerodur® 4542	1.4542	Z7CNU17-04	AISI 630	Deutsche Edelstahlwerke	AMS 5643
UGIPURE® 15-5 PH / UGIPURE® 4545				Ugitech	AMS 5659 type II - NF EN 2815 - NF EN 2817 - NF EN 2821 - WL 1.4545
Aerodur® 4545	1.4545	E-Z5CNU15-05	UNS 15500 / 15-5	Deutsche Edelstahlwerke	AMS 5659 - WL 1.4545 - NF EN 2817 - LAT1-9037
UGIPURE® 17-4 PH / UGIPURE® 4548				Ugitech	AMS 5622 type II - NF EN 3161 - WL 1.4548
Aerodur® 4548	1.4548	E-Z7CNU17-04	UNS 17400/ 17-4	Deutsche Edelstahlwerke	AMS 5622 - WL 1.4548 - NF EN 3161
UGI® 4550Q				Ugitech	AMS 5646 - WL 1.4546 - AMS QQS 763
Aerodur® 4546 / 4550	1.4546 / 1.4550	X6CrNiNb18-11	AISI 347	Deutsche Edelstahlwerke	WL 1.4546.9 - AMS 5646 - BS 2 S130 - AMS QQ-S-763
Aerodur® 4939	1.4939	Z12CNDV12	Jethete M152	Deutsche Edelstahlwerke	BS S151 - AIR9160C

Other specifications are
available on demand

Document not contractually binding. See disclaimers at back cover page of this document.

Engineering steel

Common Designations				Producer	Main specifications
Brand	German	French	American / British		
Aerodur® 3505	1.3505	100C6	-	Deutsche Edelstahlwerke	AMS 6440
Aerodur® 5815	1.5815	35NC6	-	Deutsche Edelstahlwerke	AIR 9160C - EN 2438
Aerodur® 6562	1.6562	-	SAE / AISI 4340	Deutsche Edelstahlwerke	AMS 6414 - AMS 6415 - AMS 6409 - AMS6484 - MIL S5000 - MIL S8844
Aerodur® 6604	1.6604	30CND8	-	Deutsche Edelstahlwerke	WL 1.6604
Aerodur® 6657	1.6657	16NCD13	-	Deutsche Edelstahlwerke	BS S157 - AIR 9160C
Aerodur® 6657 mod	1.6657	-	SAE 9310	Deutsche Edelstahlwerke	AMS 6260 - AMS 6265 - AMS 6267
Aerodur® 6657	1.6657 ESR	E16NCD13	-	Deutsche Edelstahlwerke	AMS 6263
Aerodur® 6722 / 6723	1.6722 / 1.6723	-	-	Deutsche Edelstahlwerke	BS S82
Aerodur® 6743	1.6743	-	-	Deutsche Edelstahlwerke	BS S97 - S154 - S140
Aerodur® 6745	1.6745	-	-	Deutsche Edelstahlwerke	BS S98, S99
Aerodur® 6747	1.6747	30NCD16	-	Deutsche Edelstahlwerke	AIR 9160C
Aerodur® 6747	1.6747	35NCD16	-	Deutsche Edelstahlwerke	AIR 9160C
Aerodur® 6928	1.6928	-	300M - SAE 4340M	Deutsche Edelstahlwerke	AMS 6417 - AMS 6419 - BS S155
Aerodur® 7220	1.7220	35CD4	-	Deutsche Edelstahlwerke	AIR 9160C
Aerodur® 7223	1.7223	40CD4	SAE 4140	Deutsche Edelstahlwerke	AMS 6382
Aerodur® 7734	1.7734	15CDV6	-	Deutsche Edelstahlwerke	WL 1.7734 - AIR 9160C - EN 3523
Aerodur® 8515	1.8515	30CD12	-	Deutsche Edelstahlwerke	BS S106 - AIR 9160C
Aerodur® 8522	1.8522	32CDV13	-	Deutsche Edelstahlwerke	AIR 9160C
Aerodur® 8523	1.8523	40CDV12	-	Deutsche Edelstahlwerke	BS S132 - AIR 9160C

Super alloy¹

Common Designations				Producer	Main specifications
Brand	German	French	American / British		
HQ286 AERO	1.4944	EZ6NCTDV25.15	UNS S66286	Ugitech	AMS 5931 - AMS 5853
HQ 400	2.4360	NiCu30Fe	UNS N04400	Ugitech	AMS 4730
HT600	2.4816	NC15Fe	UNS N06600	Ugitech	-
HT625	2.4856	NiCr22Mo9Nb	UNS N06625	Ugitech	AMS 5666
HT X750	2.4669	NiCr15Fe7Ti2A	UNS N07750	Ugitech	AMS 5698 - AMS 5699
HT 718	2.4668	NiCr19Fe19Nb5Mo3	UNS N07750	Ugitech	AMS 5962
HT90	2.4632	NCK20TA	UNS N07090	Ugitech	-
HT80	2.4952 / 2.4631	NC20TA	UNS N07080	Ugitech	-
HT605	2.4964	CoCr20W15Ni	UNS R30605	Ugitech	AMS 5759
KC35N	2.4999	-	UNS R30035	Ugitech	AMS 5844
PHYNOX® PHYNOX® is a registered trademark of APERAM	2.4711	K13C20N16Fe15D07	UNS R30003 / R 30008	-	-

Other specifications are
available on demand

¹These grades are only
delivered as coils or bars
Ø ≤ 15 mm (conversion
processing)

Document not contractually binding. See disclaimers at back cover page of this document.



Document not contractually binding. See disclaimers at back cover page of this document.

Know-How in metallurgy and manufacturing of metal powder



Deutsche Edelstahlwerke offers a wide range of gas atomized Fe-, Ni- and Co-based metal powders. These are ideally adapted for additive manufacturing.

The know-how of Deutsche Edelstahlwerke is characterized by more than 160 years of experience in steel production. All products are manufactured using state-of-the-art technology - from powder and semi-finished products to ready-to-install components.


For powder production, raw materials are melted in an induction furnace and filled in an atomizer.

The atomization process takes place in a closed container in which the liquid melt is atomized under high pressure with an inert gas.

In gas atomization, the solidification rate is sufficiently low so that the particles are formed in spherical shape.

The spherical particles guarantee excellent flow characteristics and dosing of the powder. The powder is also separated under inert gas. This ensures that the powder cools down without surface oxidation. The result is a low oxygen content in the powder.

Metal powder production: Fe-, Ni- and Co-based alloys

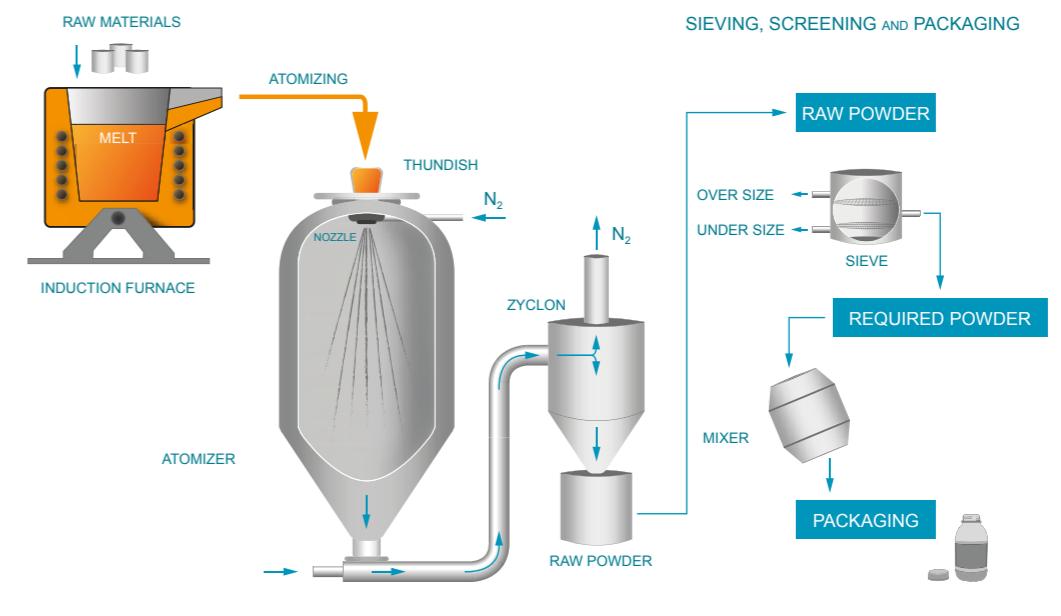

Document not contractually binding. See disclaimers at back cover page of this document.

The Printdur®-Portfolio¹ for aerospace applications

Iron-based alloys

Grade / Standard	Chemical composition [weight-%]									
	C	Si	Mn	Cr	Mo	Ni	Co	Cu	Nb	V
Printdur® 4404 (1.4404 / 316 L)	< 0.03	1.0	1.0	17.0	2.0	13.0	-	-	-	-
Printdur® 4545 (1.4545 / 15-5 PH)	< 0.04	0.3	0.6	15.0	-	5.0	-	3.0	0.3	-
Printdur® 4548 (1.4548 / 17-4 PH)	< 0.07	1.0	1.0	17.0	-	4.0	-	4.0	0.3	-


Nickel-based alloys

Grade / Standard	Chemical composition [weight-%]									
	C	Si	Mn	Cr	Mo	Fe	Co	Cu	Nb	
Printdur® Ni625 LFe (~2.4856 / ~Alloy 625)	< 0.03	0.5	0.5	22.0	9.0	< 0.5	< 0.5	-	3.5	
Printdur® Ni625 (2.4856 / Alloy 625)	< 0.03	0.5	0.5	22.0	9.0	5.0	< 1.0	-	3.5	

From the idea to the ready-to-use product

From your own alloying idea to the end product - we support you in every step

- Definition of requirements
- Material development
- Powder atomization: from very small to large quantities
- Testing and optimization of materials in the latest AM systems
- Support for powder recycling

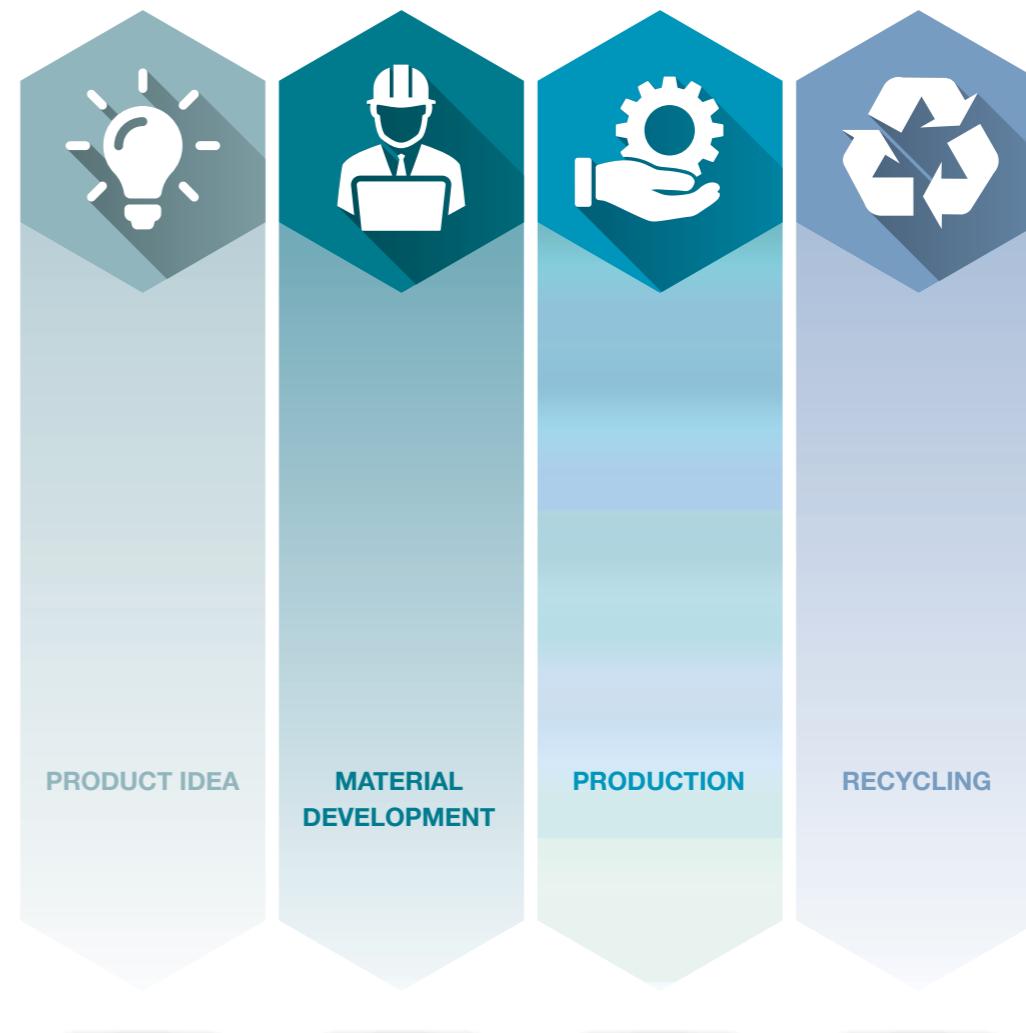

¹ In addition to the illustrated Printdur® grades, we manufacture other grades by powder metallurgy. Customer-specific solutions are possible. Our powders are available in a grain size distribution from 0 - 250 µm. For Additive Manufacturing, a grain size distribution from 20 - 53 µm is typically used. Fractionations according to customer requirements are possible. Just contact us. Our metal powder production is certified according to IATF 16949 (Quality Management Automotive) and DIN EN ISO 13485 (Quality Management Medical Devices).

Document not contractually binding. See disclaimers at back cover page of this document.

UGIWAM® offer extends the Ugitech product range.

The promising WAAM* technology develops a higher productivity than other processes (SLM, EBM) up to 5Kg per hour. Synergies exist between welding sources and multi-axis robots in order to increase operating time of machines in workshops.

Additive manufacturing allows:

- To make massive parts of large dimensions, small series, prototyping.
- Additions of material on large parts.
- Functional additions - Geometries not achievable by conventional or subtractive processes.
- "Near net shape" parts that reduce production and material costs.

Ugitech is equipped with the latest control and test technologies. The raw material is controlled in Ugine in an ISO 17025 accredited laboratory.

Relying on the Ugitech Research Center, especially on its welding department (raw materials and processes), the technical support and its worldwide team of advisers and experts, is at the disposal of our customers to help, inform and support them in many areas such as corrosion, welding, stainless steel service life and the characterization of their mechanical and structural properties (MET and SEM analyses).



Drawn wire for aerospace additive manufacturing materials

With our new range of products UGIWAM®, Ugitech guarantees total control of the process.

From the elaboration of steel to the welding filler wire, using our remelting capabilities when required, Ugitech supplies drawn wire of the highest quality for high demanding aerospace components, and all dedicated to the Wire Arc Additive Manufacturing (WAAM) technology.

Thanks to its two drawn wire production plants, Bourg-en-Bresse (France) and San Vendemiano (Italy), Ugitech has the resources and the technical expertise of a major leading group in stainless steels and Nickel alloys serving the welding market.

A key actor in the field of innovation thanks to its research and development center, Ugitech will be able to provide the solution that will meet your needs!




Document not contractually binding. See disclaimers at back cover page of this document.

UGIWAM® dedicated to the Aerospace market

Ugitech offers a wide range of products including stainless steels and nickel alloys.

Chemical composition								Chemical composition		
Ugitech Grades	C	Si	Mn	Ni	Cr	Mo	Cu	Other elements	Comments	
Austenitic	UGIWAM® 304L	≤ 0.03	0.65 - 1.0	1.0 - 2.5	0.9 - 11.0	19.5 - 21.0	≤ 0.5	≤ 0.5		Excellent corrosion resistance in natural and urban environments.
	UGIWAM® 316L	≤ 0.03	0.65 - 1.0	1.0 - 2.5	11.0 - 14.0	18.0 - 20.0	2.5 - 3.0	≤ 0.5		Excellent corrosion resistance in natural, urban and industrial environments, even in the presence of a moderate concentration of chlorides.
	UGIWAM® 316LSi	≤ 0.03	0.65 - 1.0	1.0 - 2.5	11.0 - 14.0	18.0 - 20.0	2.5 - 3.0	≤ 0.5		Excellent corrosion resistance in natural, urban and industrial environments in the presence of a moderate concentration of chlorides.
	UGIWAM® 347	≤ 0.08	0.65 - 1.0	1.0 - 2.5	9.0 - 11.0	19.0 - 21.0	≤ 0.5	≤ 0.5	Nb: 10xC - 1.0	Excellent corrosion resistance even at high temperatures (→ 810 °C). Chemical analysis according to AMS 5646.
PH Grades	UGIWAM® 17-4PH	≤ 0.05	≤ 0.5	≤ 1.0	4.0 - 5.0	15.0 - 16.0	0.5	3.0 - 4.0	Nb: 5xC - 0.45	Excellent corrosion resistance combined with good toughness. Chemical analysis according to AMS 5643. Aging treatments can be carried out to get different levels of mechanical characteristics.
	UGIWAM® 15-5PH	≤ 0.05	≤ 0.5	≤ 1.0	4.0 - 5.0	14.5 - 15.5	0.5	2.5 - 3.5	Nb: 5xC - 0.45	Excellent corrosion resistance combined with good toughness up to 310 °C. Chemical analysis according to AMS 5659. Aging treatments can be carried out to get different levels of mechanical characteristics.
	UGIWAM® 17-7PH	≤ 0.08	≤ 0.5	≤ 0.9	6.5 - 7.75	16.0 - 18.0	0.1	-	Al: 0.75-1,5	A semi-austenitic structural hardening (PH) stainless steel when high service temperature is required. Similar mechanical properties, higher impact strength, and comparable corrosion resistance to 17-4 PH or 15-5 PH. Chemical composition is conform to AMS 5644.
Nickel Base	UGIWAM® 625	≤ 0.03	≤ 0.013	≤ 1.0	≥ 60.0	21.0 - 23.0	8.5 - 9.5	≤ 0.5	Fe: 1.0 - (Nb+Ta): 3.2 - 4.0	Base-Nickel alloyed with Chromium and Molybdenum. Nuance with excellent corrosion resistance even in very aggressive environments.
	UGIWAM® 718	≤ 0.03	0.1	-	53	17	3	-	Al = 0.4 Ti = 0.9 Nb = 5.0	Age-hardenable Nickel Chromium Alloy with very high strength after aging treatment due to Ti, Al and Nb addition. The grade is offering high creep-rupture strength at high temperature till about 700°C. Chemical composition is conform to AMS standards

Document not contractually binding. See disclaimers at back cover page of this document.

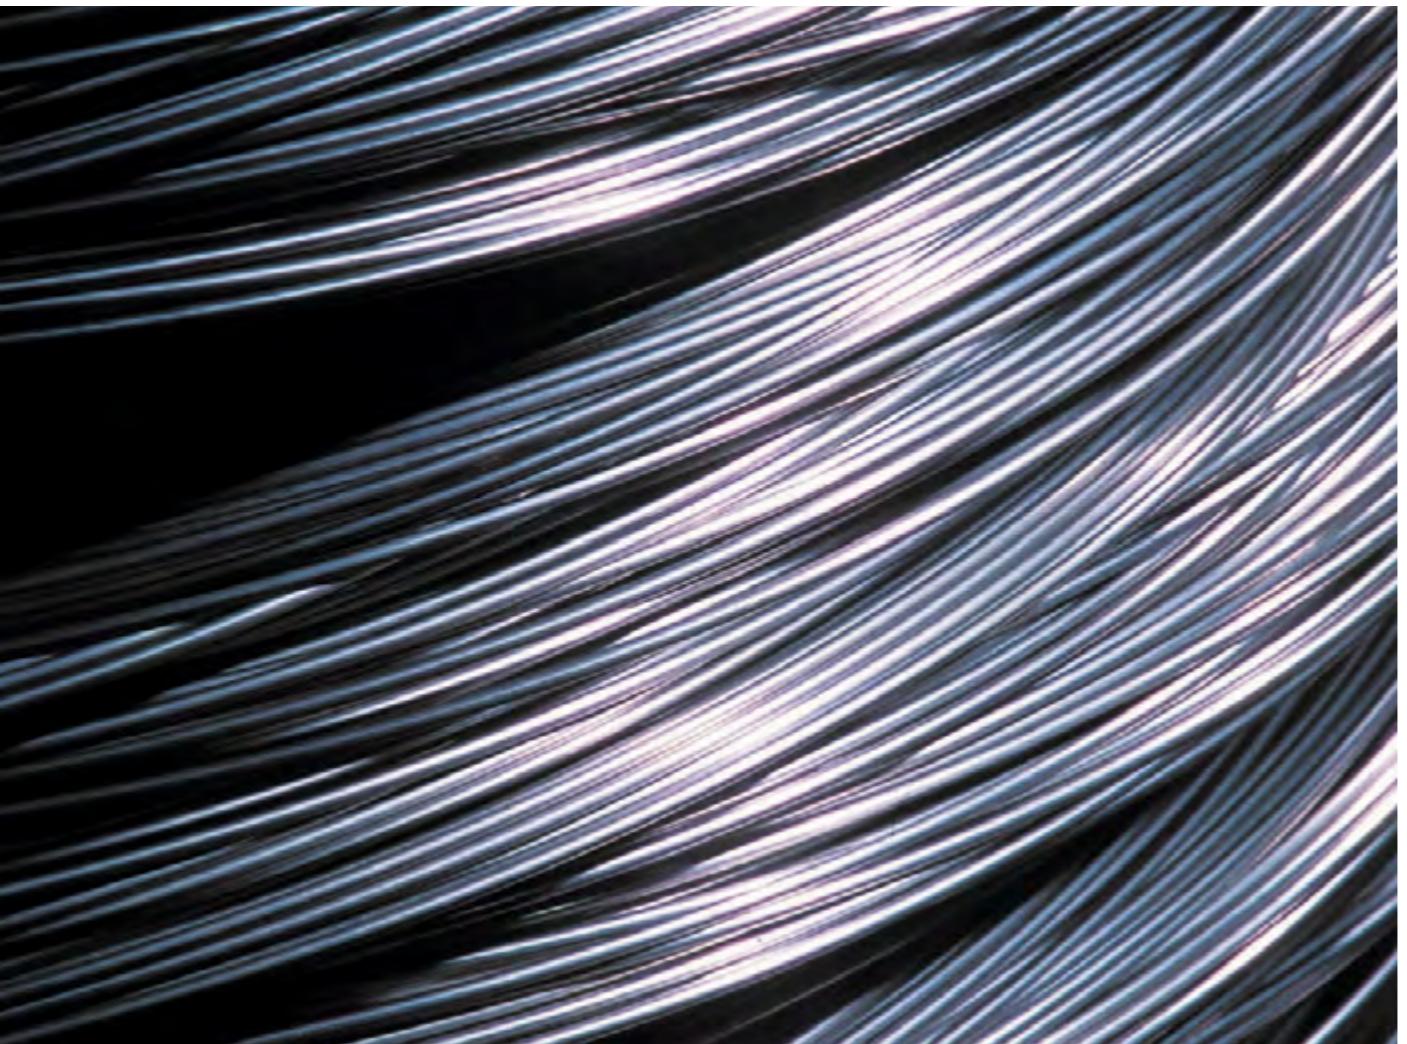

The benchmark materials for aerospace applications

The demanding quality requirements of the aerospace industry, to ensure optimal product quality and reproducibility, mandate that the supplying companies are extensively supervised. AS 9100, AS 9120 and NADCAP are prominent examples for certificates that aerospace related customers require. Ugitech and/or Deutsche Edelstahlwerke are certified/accredited by:

- ISO 9001 (quality management system)
- ISO 14001 (environmental management system)
- ISO 50001 (energy management system)
- AS 9100 (aerospace producer)
- AS 9120 (aerospace stockholder)
- NADCAP (special process)
- ISO 17025 (testing laboratories)

In many cases individual customer approvals are additionally necessary for deliveries into the aircraft industry. Deutsche Edelstahlwerke and Ugitech have achieved a wide range of OEM and sub-contractor approvals.

Deutsche Edelstahlwerke and Ugitech combine their strengths to carry out common qualifications by major primes, and obviously offer a full range of products and logistic services dedicated to the Swiss Steel Group worldwide development.

Our customers can leverage on this alliance for their future.


General note (liability)

Printing errors, omissions and changes accepted. Product-specific data sheets have priority over the information providing in this brochure. The desired performances characteristics are binding only if they are exclusively agreed upon at the conclusion of the contract.

Document not contractually binding. See disclaimers at back cover page of this document.

Swiss Steel Group, cleared for takeoff.

Embrace pure and qualified materials —
designed to fly, built for a safe and sustainable sky.

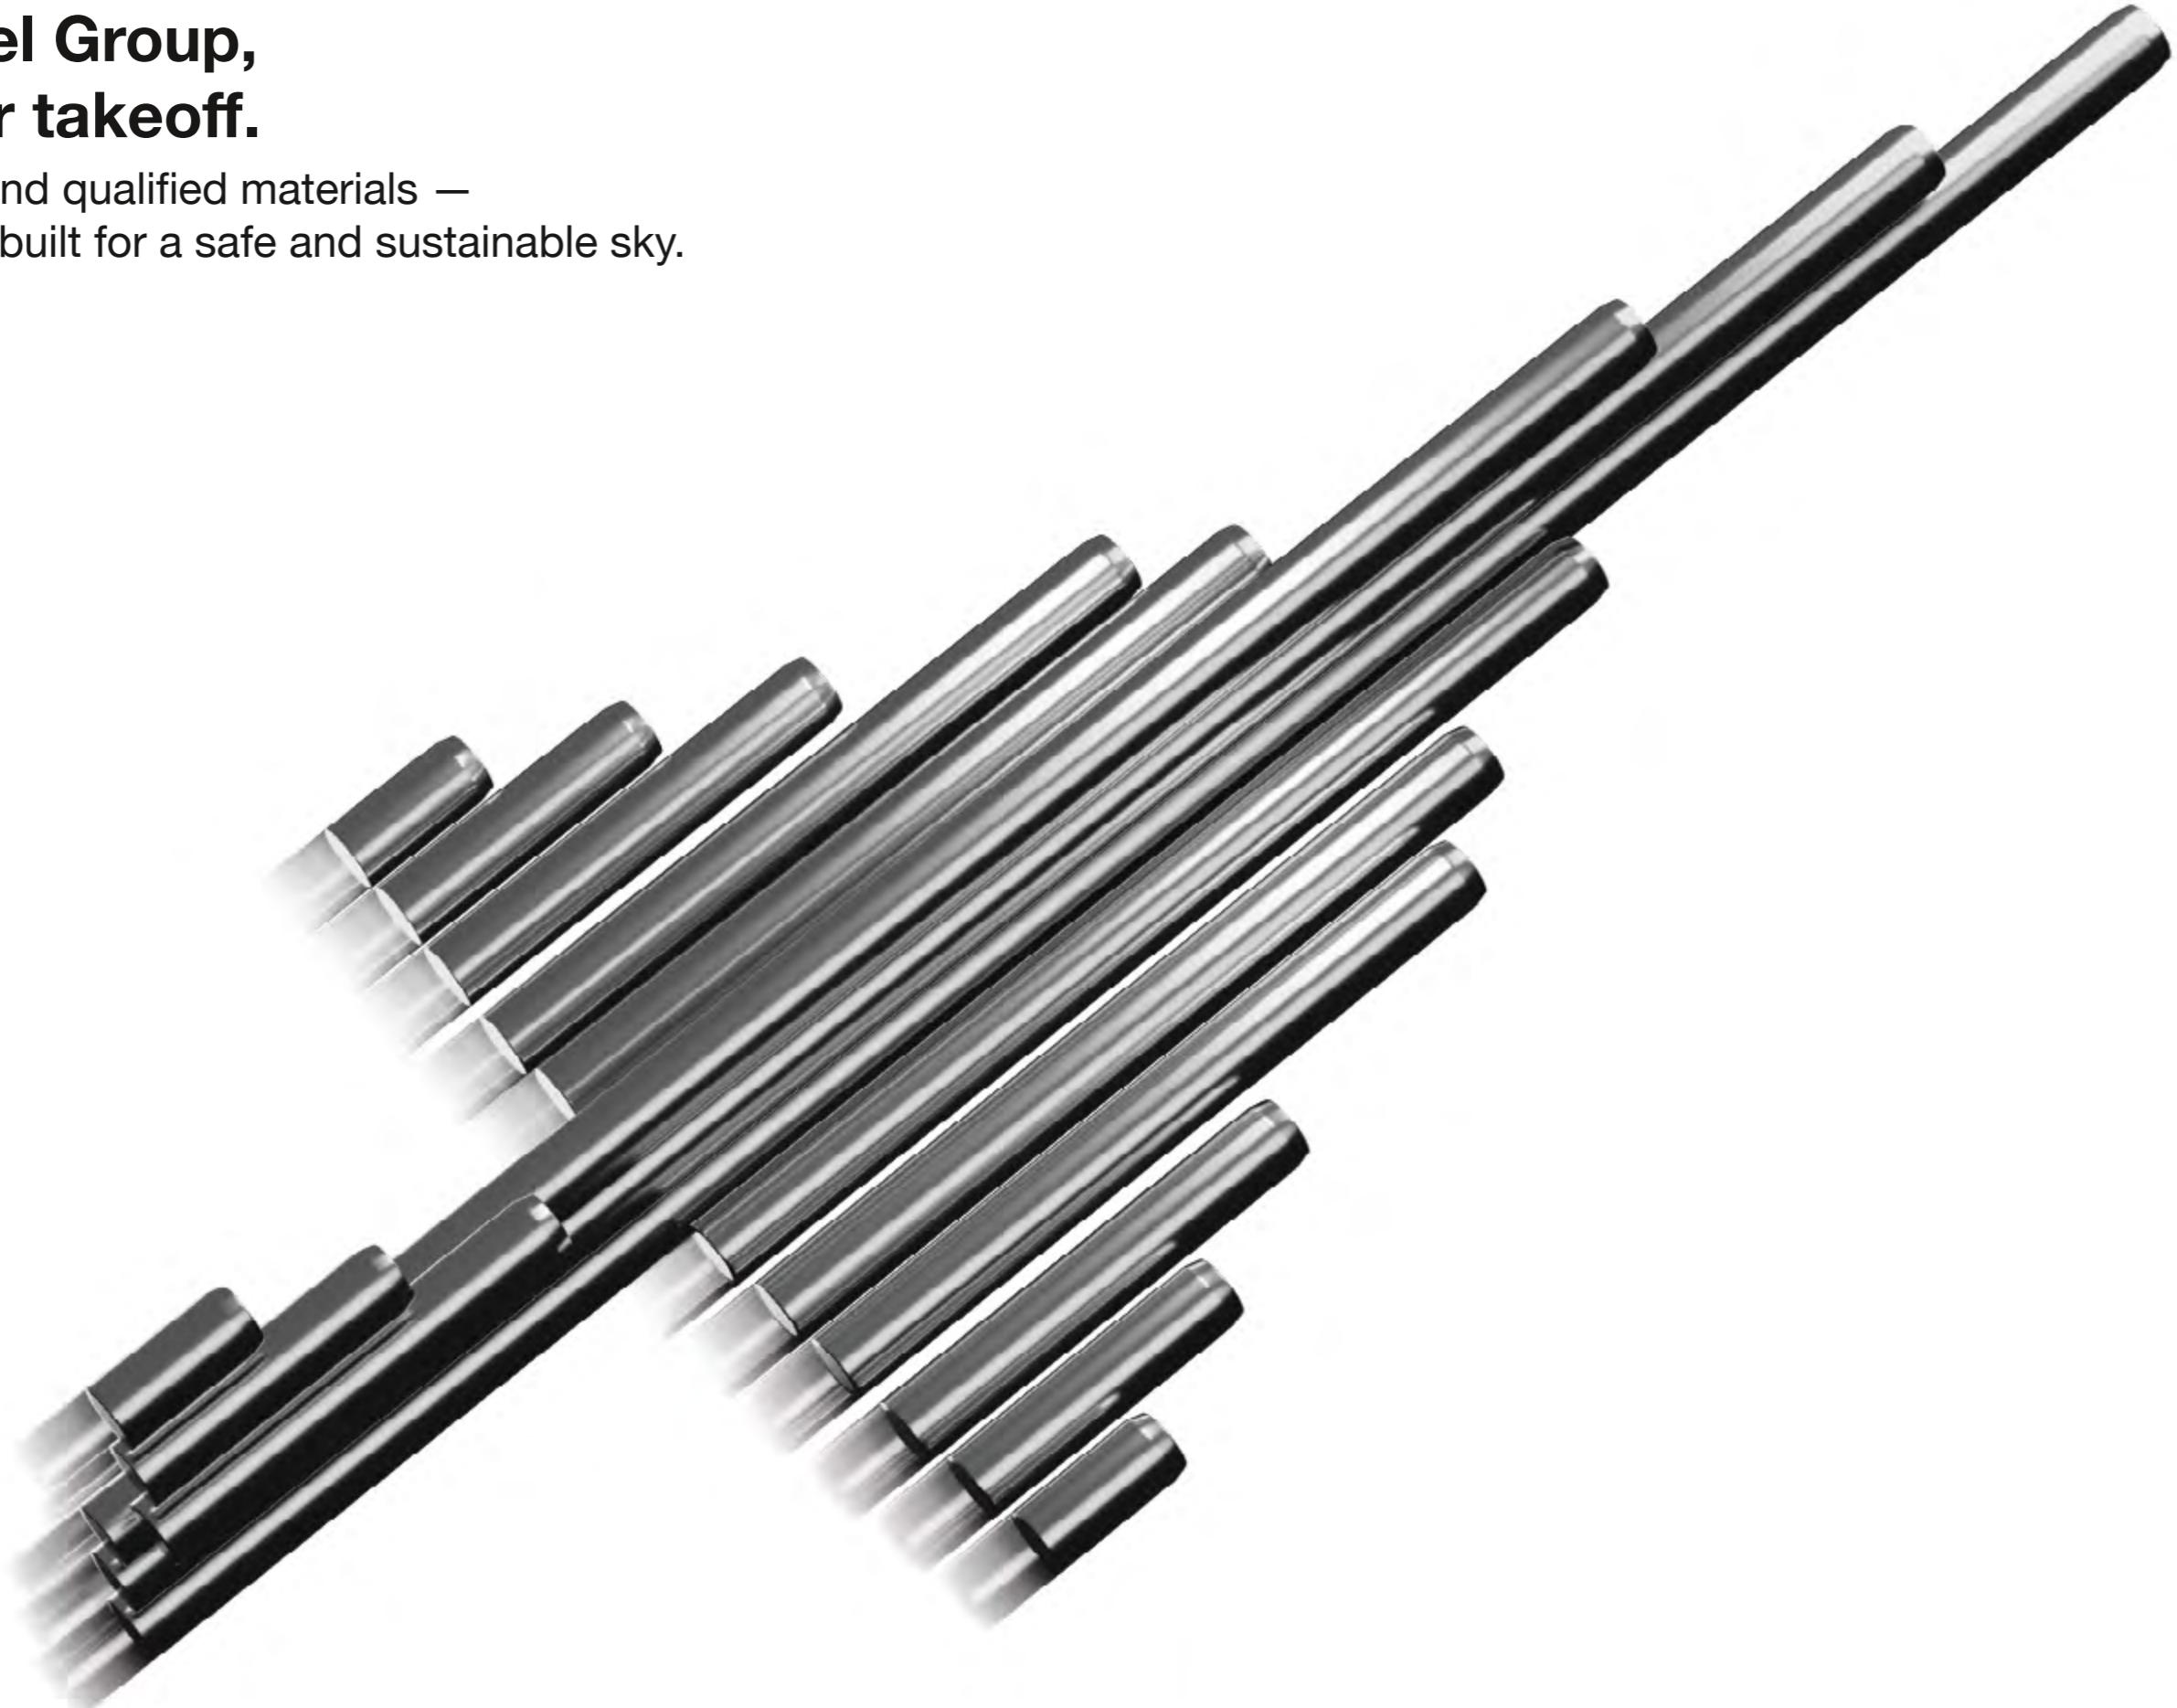

**Swiss Steel Group**

aerospace@swisssteelgroup.com
www.swisssteel-group.com

Find your local contact:

